

The recommended CCSDS 131.2-B-1 standard introduces a Serial Concatenated Convolutional Code (SCCC). Main goal of this code is to allow an efficient use of available bandwidth, by allowing to select from 27 valid configurations with a wide range of constellations, block lengths and code rates.

The outstanding error correction performance of the SCCC code in combination with the high data rates makes this IP core the ideal fit for further applications where high throughput and high spectral efficiency is key for operation.

Benefits

- Burst-to-burst on-the-fly configuration.
- High payload block length granularity (between 5,758 and 43,678 bits).
- High code rate granularity (code rates between 0.36 and 0.90).
- Configurable amount of turbo decoding iterations for trading-off throughput and error correction performance.
- Low-power and low-complexity design.
- Available for ASIC and FPGAs (Xilinx, Intel).

Performance Figures

- Coded throughput of up to 1.25 Gbit/s at 200 MHz and 10 iterations
- Symbol rates of up to 372 MSymbols/s at 200 MHz
- E_s/N_0 at 20 iterations and block error rate of 10^{-4} :
 - 1.7dB (QPSK, 16,200 bits, code rate 0.52)
 - 4.01dB (8-PSK, 24,300 bits, code rate 0.46)
 - 8.28dB (16-APSK, 32,400 bits, code rate 0.59)
 - 11.56dB (32-APSK, 40,500 bits, code rate 0.64)
 - 14.83dB (64-APSK, 48,600 bits, code rate 0.69)



Features

- Compliant with CCSDS 131.2-B-1
- Support for all 27 ACM formats
- Support for all modulation schemes (QPSK, 8-PSK, 16-APSK, 32-APSK, 64-APSK)


Applications

- Satellite communication
 - High data rate telemetry applications
 - Earth Exploration Satellite Service (EESS)
- Applications with the highest demands on forward error correction
- Applications with the need for a wide range of code rates and block lengths


Deliverables

- VHDL source code or synthesized netlist
- HDL simulation models e.g. for Aldec's Riviera-PRO
- VHDL testbench
- Bit-accurate Matlab, C or C++ simulation model
- Comprehensive documentation

The following figure outlines the building blocks contained within the Creonic CCSDS SCCC turbo encoder IP core.

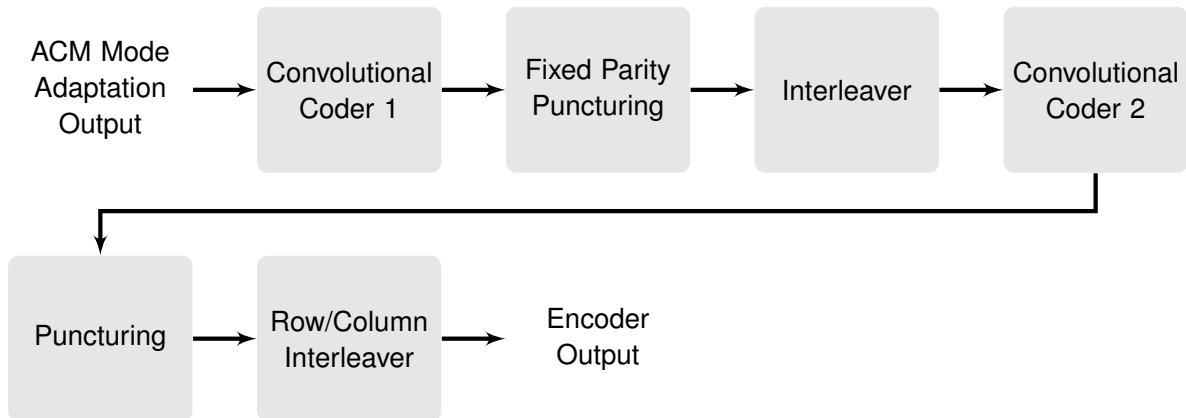

The decoder performs the same steps on the receiver side but adds a soft-decision demapper. Decoding is an iterative process. Data handed over multiple times between convolutional decoder 1 and 2.

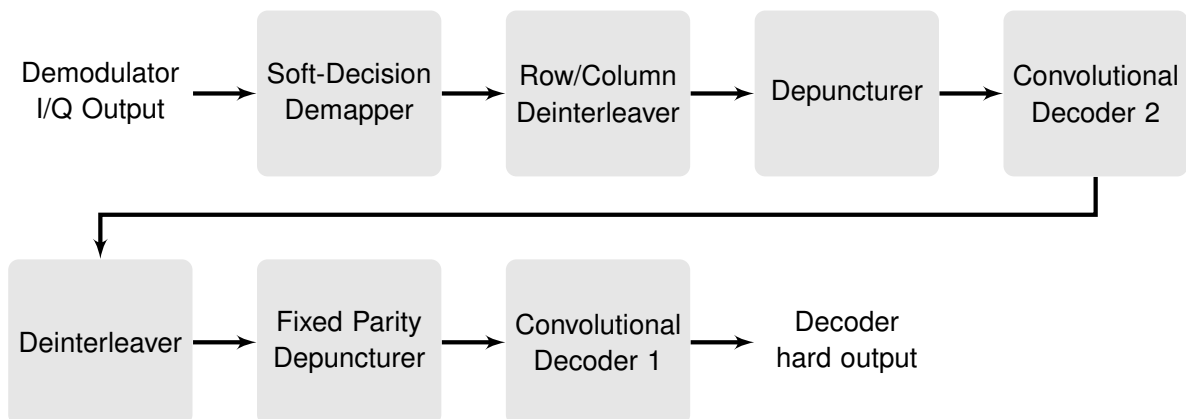

Related Products

[CCSDS LDPC Encoder and Decoder](#)

[CCSDS AR4JA LDPC Encoder and Decoder](#)

[DVB-RCS2 Turbo Decoder](#)

[DVB-S2X LDPC and BCH Decoder](#)

About Creonic

Creonic is an ISO 9001:2015 certified provider of ready-for-use IP cores for several algorithms of communications such as forward error correction (LDPC, Turbo, Polar), modulation, and synchronization. The company offers the richest product portfolio in this field, covering standards like 5G, 4G, DVB-S2X, DVB-RCS2, DOCSIS 3.1, WiFi, WiGig, and UWB. The products are applicable for ASIC and FPGA technology and comply with the highest requirements with respect to quality and performance. For more information please visit our website at www.creonic.com.

Contact

Creonic GmbH
Bahnhofstr. 26-28
67655 Kaiserslautern
Germany

Phone: +49 631 3435 9880
Fax: +49 631 3435 9889
Web: www.creonic.com
E-mail: sales@creonic.com

Twitter: [Creonic_IPCores](#)
Facebook: [Creonic](#)
LinkedIn: [Creonic](#)
